


🔍 Cirrus 6003-2

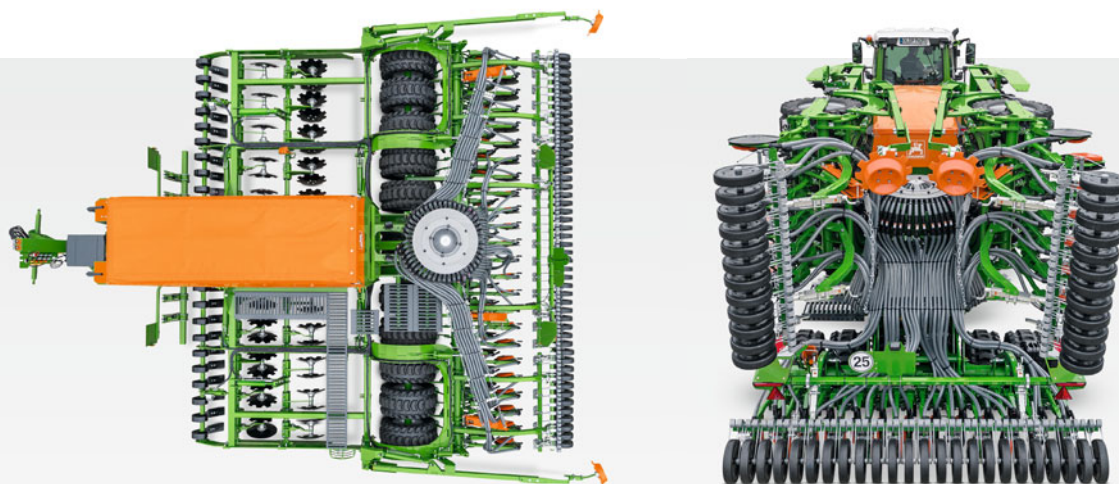

	Cirrus 3003 Compact	Cirrus 4003	Cirrus 4003-C	Cirrus 4003-CC	Cirrus 4003-2	Cirrus 4003-2C	Cirrus 4003-2CC	Cirrus 6003-2	Cirrus 6003-2C	Cirrus 6003-2CC
Coulter system	RoTeC pro/TwinTeC <sup>+</sup>	RoTeC pro			RoTeC pro/TwinTeC <sup>+</sup>					
Row spacing (cm)	RoTeC pro 12,5/16,6/TwinTeC <sup>+</sup> 12,5/16,6									
Operational speed (km/h)	RoTeC pro 8–16/TwinTeC <sup>+</sup> 10–20									
Working width (m)	3.00	4.00						6.00		
Transport width (m)	3.00	4.00			3.00					
Transport length (m)*	6.96/ 7.10**	7.78			8.10/8.20**					
Transport height (m)	3.16		3.25		3.16	3.55		3.84		
Execution	rigid				folding					
Power requirement (kW/hp)	90/120	120/160						164/220		
Seed hopper capacity (l) <small><sup>1</sup> Twin outlet pressurised hopper seed/fertiliser hopper (l)</small>	3,000	3,600	4,000 <sup>1</sup>		3,600	4,000 <sup>1</sup>		3,600	4,000 <sup>1</sup>	
Fill height (m)	2.90		2.80		2.90	2.80		2.90	3.00	
Filling width (m)	1.90	2.60	2 x 1.25		2.60	2 x 1.25		2.60	2 x 1.25	
Filling depth (m)	0.80		0.70		0.80	0.70		0.80	0.70	
Linkage	Lower link cross shaft Cat. 3/4N/K700									
Basic weight from (kg)	3,600	4,200		4,700	6,300		6,900	7,500		8,300
Transport running gear	integrated									
Number of Matrix/AS tyres	6	8						12		

\* by the extension of the telescopic drawbar the transport length can vary.

\*\*TwinTeC<sup>+</sup>

Illustrations, content and technical data are not binding and may differ depending on the level of equipment. Country-specific road traffic regulations apply and must be complied with, meaning that special approval may be required. The permissible axle loads and total weights of the tractor have to be checked. Not all the listed combination options are possible with all tractor manufacturers.