


The 14 tonne High Lift trailer features a sprung drawbar and commercial axles mounted on heavyduty tandem springs.

The main function of High Lift is discharging loads into elevated bulkers giving a clearance under the tail door of 4.75 metres. A hydraulic door is fitted as standard with a choice of door from our TB range or a non-spill pea door. Standard on 385/65 R22.5 wheels, 6 metres long, 2500 wide and body of 1225 deep. Body prop as standard.







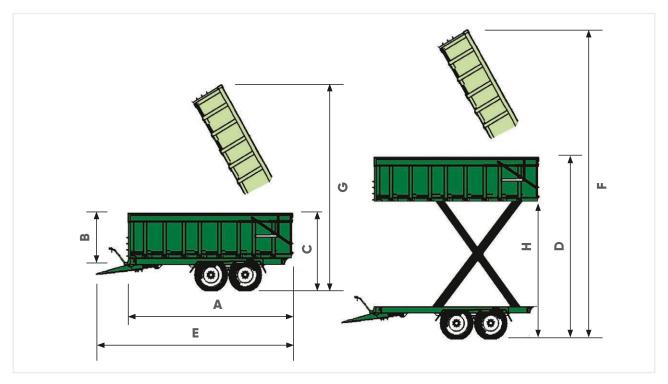

Model			HL14 Ton
Dimensions			
Body length	Α	mm	6000
Body height	В	mm	1225
Loading height	С	mm	2770
Elevated height	D	mm	6100
Overall length	E	mm	7700
Elevated tipped height	F	mm	10500
Tipped height	G	mm	6750
Lifted height	н	mm	4750
Body capacity		\mathbf{m}^3	17.27
Misc.			
Hydraulic oil		L	78.0
Number of axles			2
Axle beam	mm/s	tuds	2xcom/10
Brake size			420x180
Brake option			H/A
Tyre size			385/65 R22.5
Bottom chassis			220x90 Chan
Top chassis			150x75 RHS

BAILEY TRAILERS LIMITED