

Our range of Water Bowser's features 4 capacity options of 12,000, 15,000, 16,500 and 18,000 litres. All models feature an elliptical, low centre of gravity translucent fibreglass tank.

We specify a true fixed baffle tank, which reduces sloshing and offers greater stability. Our Water Bowsers are all mounted on a heavy-duty RHS chassis, feature commercial axles and a sprung drawbar with a multi-leaf drawbar spring.

## **Standard features**


Commercial axles, heavy-duty 100 mm wide suspension, 385/65 R22.5 10 stud remould tyres, wheels covered by plastic mudguard, 1000 L/min pump on 3" (75 mm) outlets. Stainless steel side lockers and rear locker featuring work lights and internal light. Front platform to carry standard IBC container. 2 x extra long 3" hoses with Snaplock couplings and stainless steel storage rack for hoses on both sides. Sight gauge.









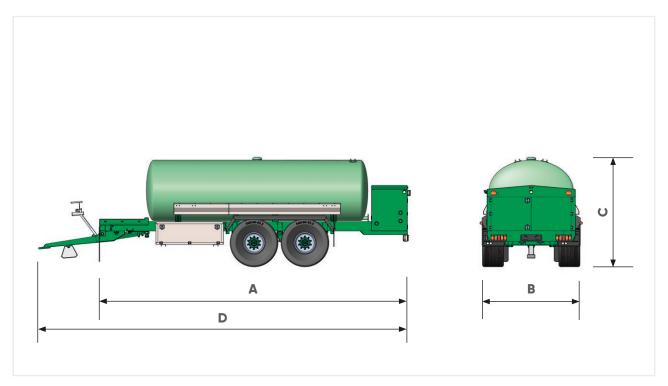

Model		12,000L	15,000L	16,500L	18,000L
Dimensions					
Body length	A mm	7320	7820	8370	8905
Overall width	B mm	2610	2610	2610	2610
Overall height	C mm	2950	2950	2950	2950
Overall length	D mm	8850	9400	9950	10485
Misc.					
Number of axles		2	2	2	2
Axle beam	mm/studs	2xcom/10			
Brake size		420x180			420x220
Brake option		H/A			
Tyre size		385/65 R22.5			