


SPEARHEAD

SNIPER 150 COMPACT



SNIPER 150 COMPACT FEATURES

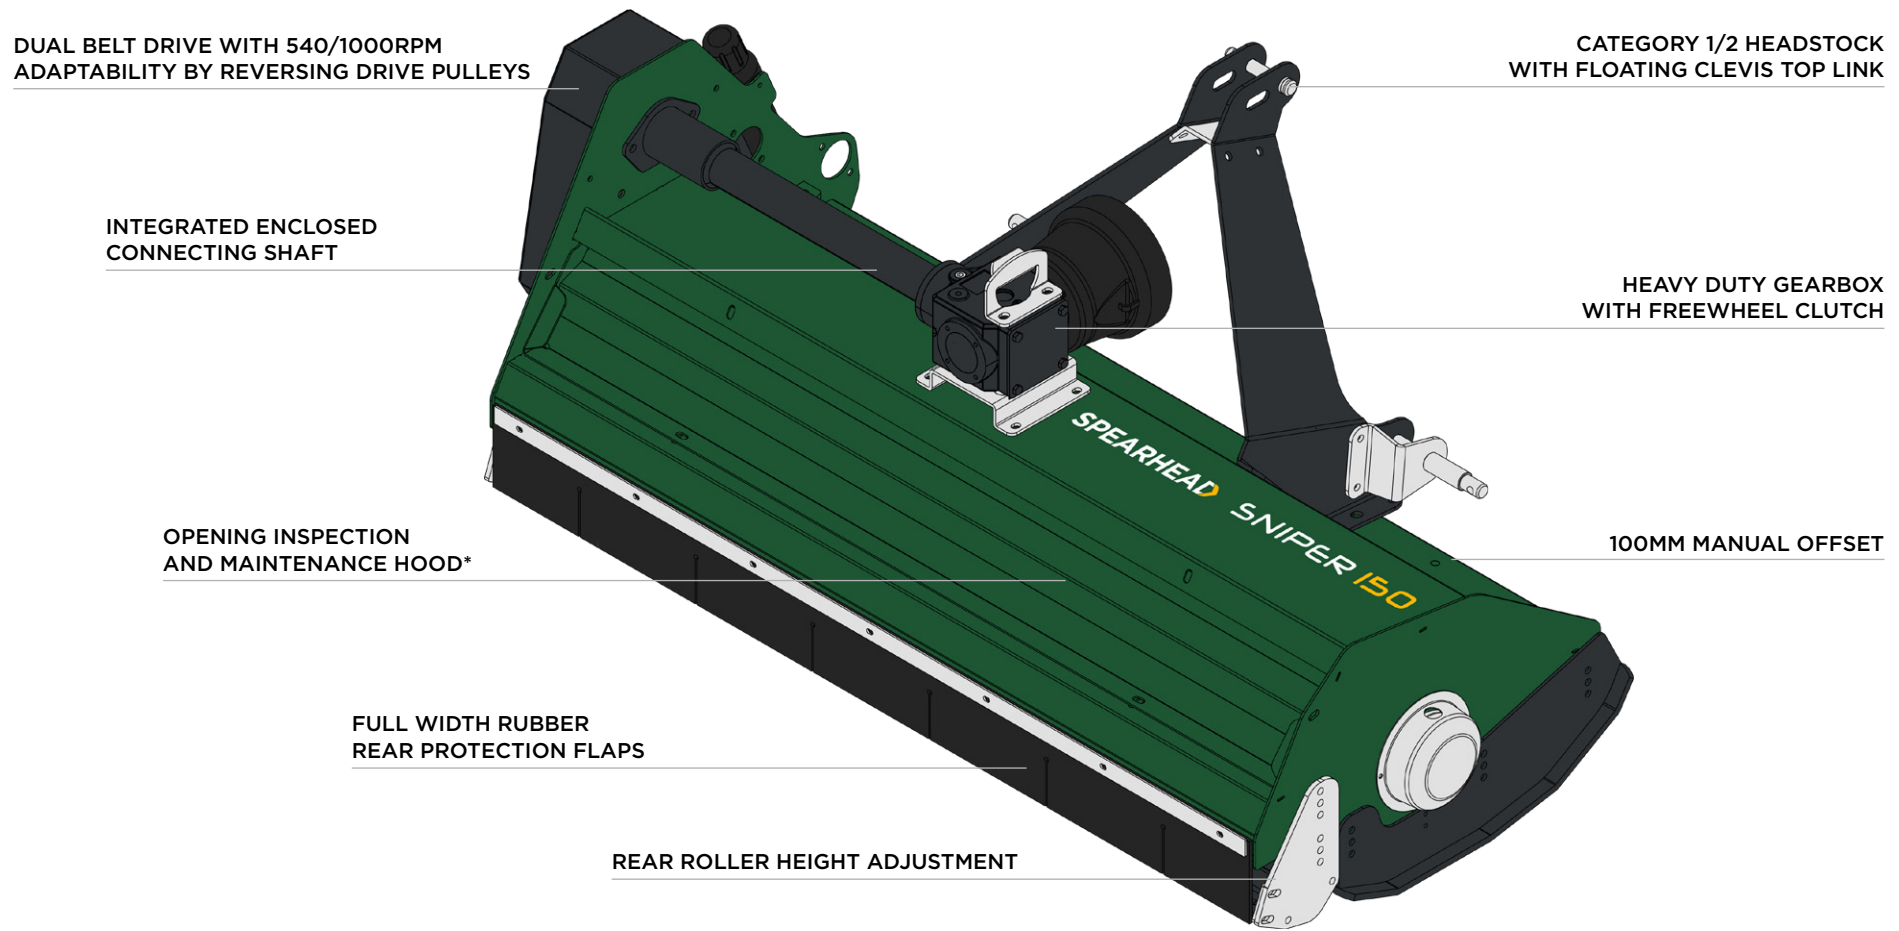

SNIPER 150

TRACTOR HP	PTO SPEED	TRANSPORT WIDTH	3 POINT LINKAGE MOUNTING	CUTTING WIDTH	FLAIL TYPE	NO. OF FLAILS	CUTTING HEIGHT
15hp (12kW)	540/1000rpm	1.67m (5' 6")	✓	1.50m (4' 11")	Heavy-duty hammer flail	22	10mm - 50mm (0.4" - 2")

COMPACT FLAIL WITH HEAVY DUTY PERFORMANCE



AGRICULTURE




PASTURE



AMENITY




LIGHT SCRUB

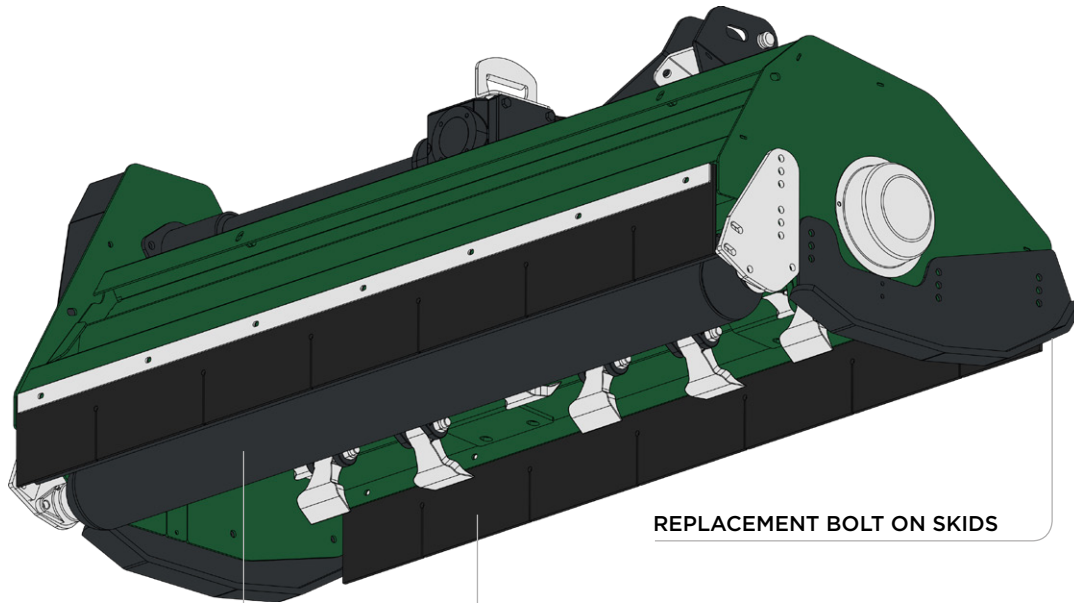

REPLACEMENT BOLT ON SKIDS


FULL WIDTH RUBBER FRONT PROTECTION FLAPS

114MM FULL WIDTH REAR ROLLER

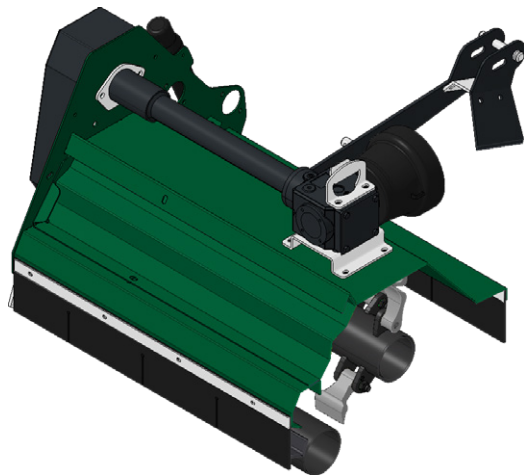

HELICAL SPIRAL ROTOR

HEAVY DUTY HAMMER FLAILS
TO CUT UP TO 30MM MATERIAL

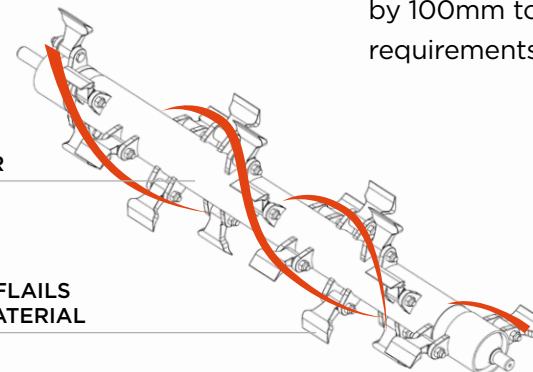

The Sniper 150 compact flail mower is the perfect choice for the small holder or small scale amenity user with an eye for achieving a high quality and consistent cut in pasture, paddock and general vegetation control applications when working with a compact tractor.

This robust machine features heavy duty hammer flails fitted on an electronically balanced spiral rotor ideally suiting it for light scrub clearance in material up to 30mm. Dependable power transmission is given through dual belt drive and in combination with full width adjustable skids and rear roller with scraper to ensure a quality, well distributed cut.

The Sniper 150 features a cutting width of 1.5 metres with an adjustable mounting headstock that can be manually offset by 100mm to further aid the working requirements of the operator.

STANDARD SPECIFICATION		SNIPER 150 COMPACT	
Machine weight	235kg (518lbs)	Gearbox	Cast iron housing with integrated enclosed connecting shaft
Hitch	Category 1-2 with floating clevis top link	Input shaft	1-3/8" Z6
Hitch position	Rear mount only	Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil
Cutting width	1.50m (4' 11")	Gearbox oil capacity	0.8 litres (1.7 pints)
Overall width	1.67m (5' 6")	Cowl construction	All welded construction
Overall length	0.78m (2' 7")	Skid construction	Replaceable bolt-on skid
Cowl height	442mm (1' 5")	Flails	Heavy-duty hammer flail
Cutting height	10mm - 50mm (0.4" - 2")	Flail quantity	22
Cutting capacity	30mm (1.2")	Flail tip speed	41m/s (8070 fpm)
Maximum offset distance (hydraulic)	100mm (4")	Rotor diameter	114mm (4.5")
Recommended tractor HP	15 - 30hp (12 - 23kW)	Roller diameter	114mm (4.5")
Power take-off speed	540/1000rpm	Number of belts	2

SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎ +44 (0)1789 491860

✉ enquiries@spearheadmachinery.com 📧 spearheadmachinery.com 🐦 📘 SpearheadWorld

