

TB 12-24



WHEN YOU NEED AN ALL ROUNDER . . .

Whether your work is arable, vegetable or silage, TB will haul the lot. Available from 15.8m³ through to 51m³, TB could be the only trailer you need.*

Robust chassis – all models mounted on either an 8 or 10 mm RHS chassis.

Heavy-duty commercial axles – on tandem springs and a sprung drawbar featuring a leaf spring ensures the ride is smooth on all terrains – partially or fully loaded.

Hydraulic braking system – works in tandem with the tractor, vital for sudden braking.

Heavy-gauge sides – plus strengthening channels and heavy-gauge floors with hollow section runners at 300 mm centres.

Long reach chromed tipping cylinders deliver approximately 50° of tip.


Hydraulic rear door – features a lock valve to secure the door tightly, and a safety valve, to prevent the door being opened when the trailer is in the down position.

Long reach 2 way rams – retained in any position to allow controlled discharge of free flowing loads, plus greater clearance for heaped loads.

Standard features

Sprung drawbar, hydraulic brakes, parking brakes, heavy-duty EN8 towing eye, skid & skid carrier, rear LED lights, hydraulic hose carrier, ladder, chromed rams, number plate holder, LED beacon, hydraulic door, mudguards, rear top lights, body prop.



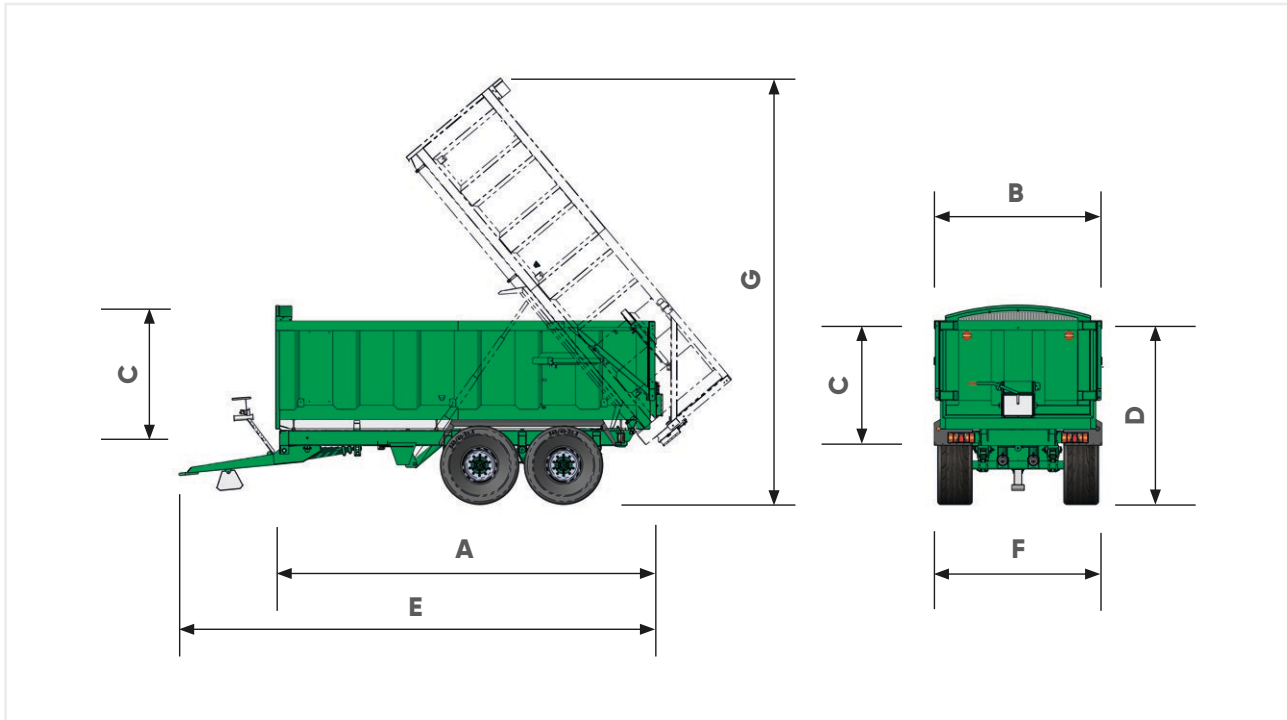

Model	TB 12	TB 14	TB 15	TB 16	TB 18	TB 20	TB 22	TB 24		
Dimensions										
Body length	A	mm	5400	6000	6000	6600	7200	7800	8400	9000
Body width	B	mm	2500	2500	2500	2500	2500	2500	2500	2500
Body height	C	mm	1225	1300	1375	1375	1375	1375	1375	1375
Loading height	D	mm	2550	2620	2700	2700	2700	2800	2800	2950
Overall length	E	mm	7060	7670	7670	8280	8890	9500	10110	10720
Overall width	F	mm	2760	2760	2760	2760	2760	2760	2760	2760
Tipped height	G	mm	6500	7000	7100	7500	8000	8500	9100	9750
Body capacity		m ³	15.8	18.7	19.7	21.7	23.7	25.7	30.7	32.9
Misc.										
Hydraulic oil	L		33.5	33.5	33.5	36.5	40.0	40.0	42.0	42.0
Number of axles			2				3			
Axle beam		mm/studs	2xcom/10				3xcom/10			
Brake size			406 x120	420x180			420 x220	420x180		
Brake option			H/A							
Tyre size			385/65 R22.5				445/65 R22.5			
Bottom chassis			250x100 RHS	250x150 RHS			300x150 RHS			
Top chassis			150x75 RHS	150x100 RHS				200x100 RHS		

BAILEY TRAILERS LIMITED

Pride Parkway, Sleaford, Lincolnshire NG34 8GL

☎ +44 (0) 1529 303411 ✉ sales@baileytrailers.co.uk 🏠 baileytrailers.co.uk